



Elevation View

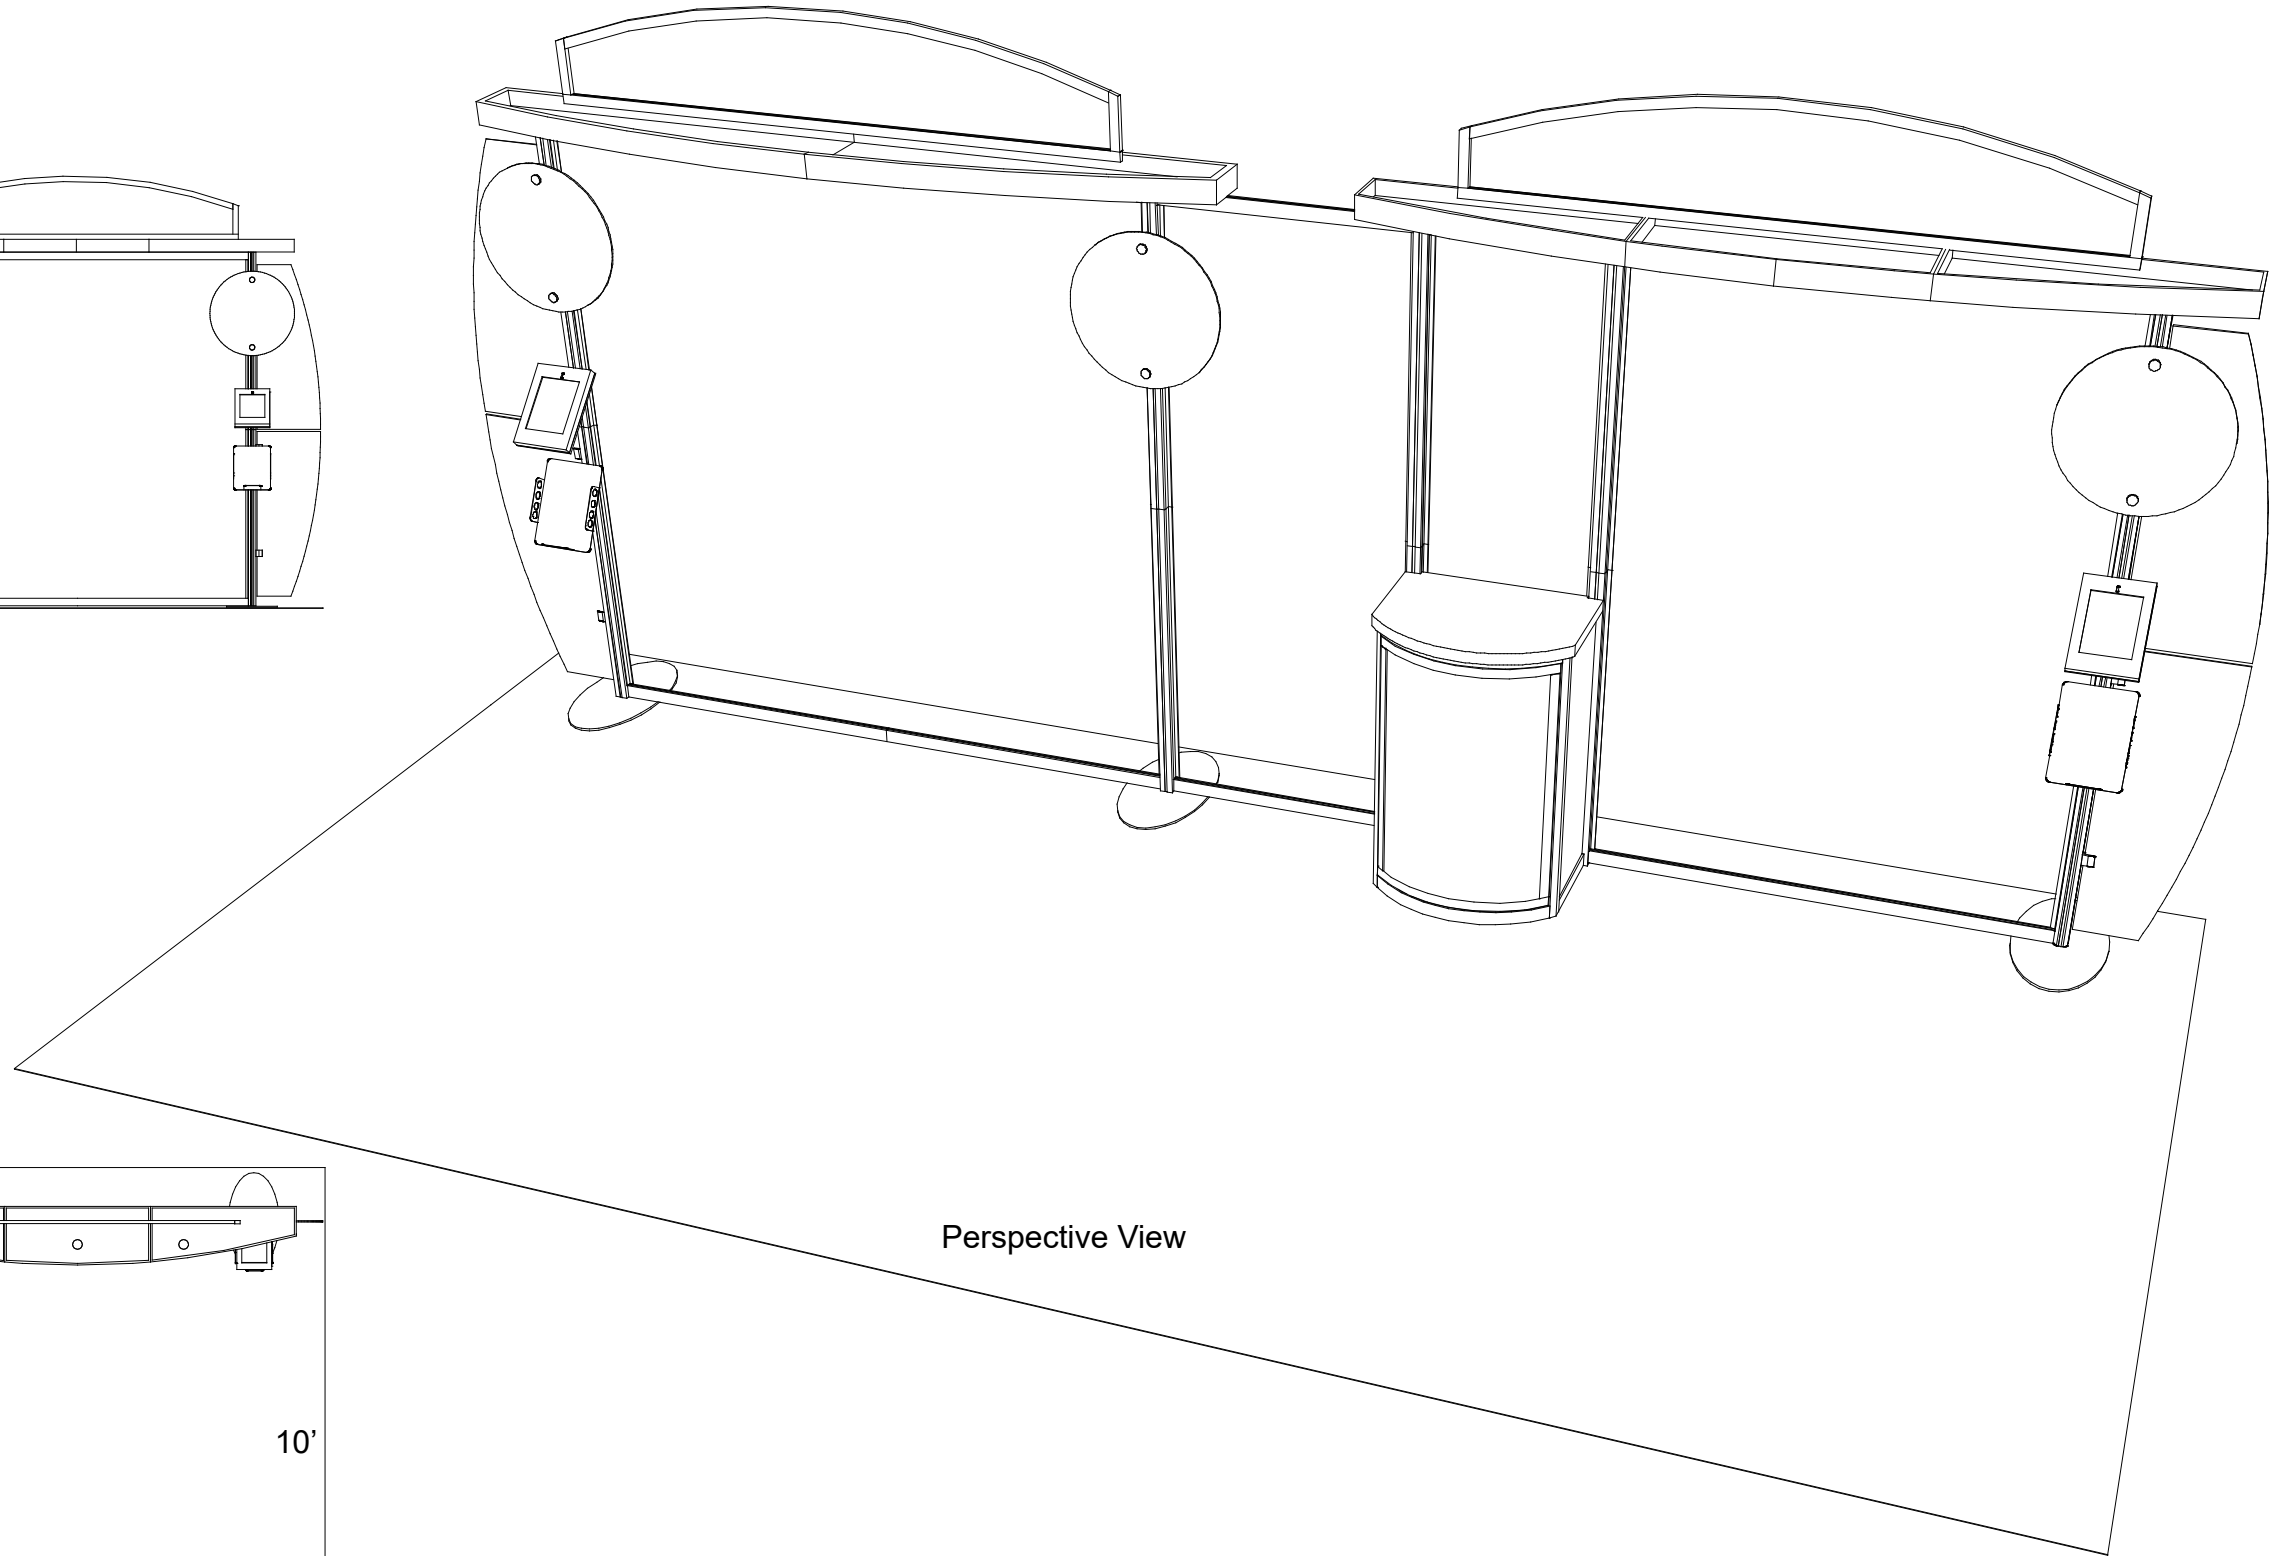


Perspective View

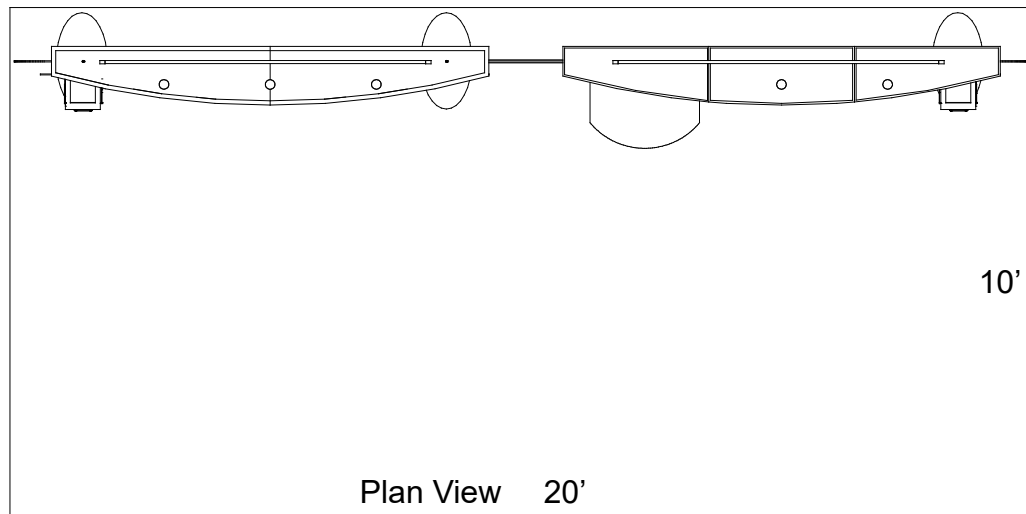


Plan View 20'

10'

# ***SETUP INSTRUCTIONS***

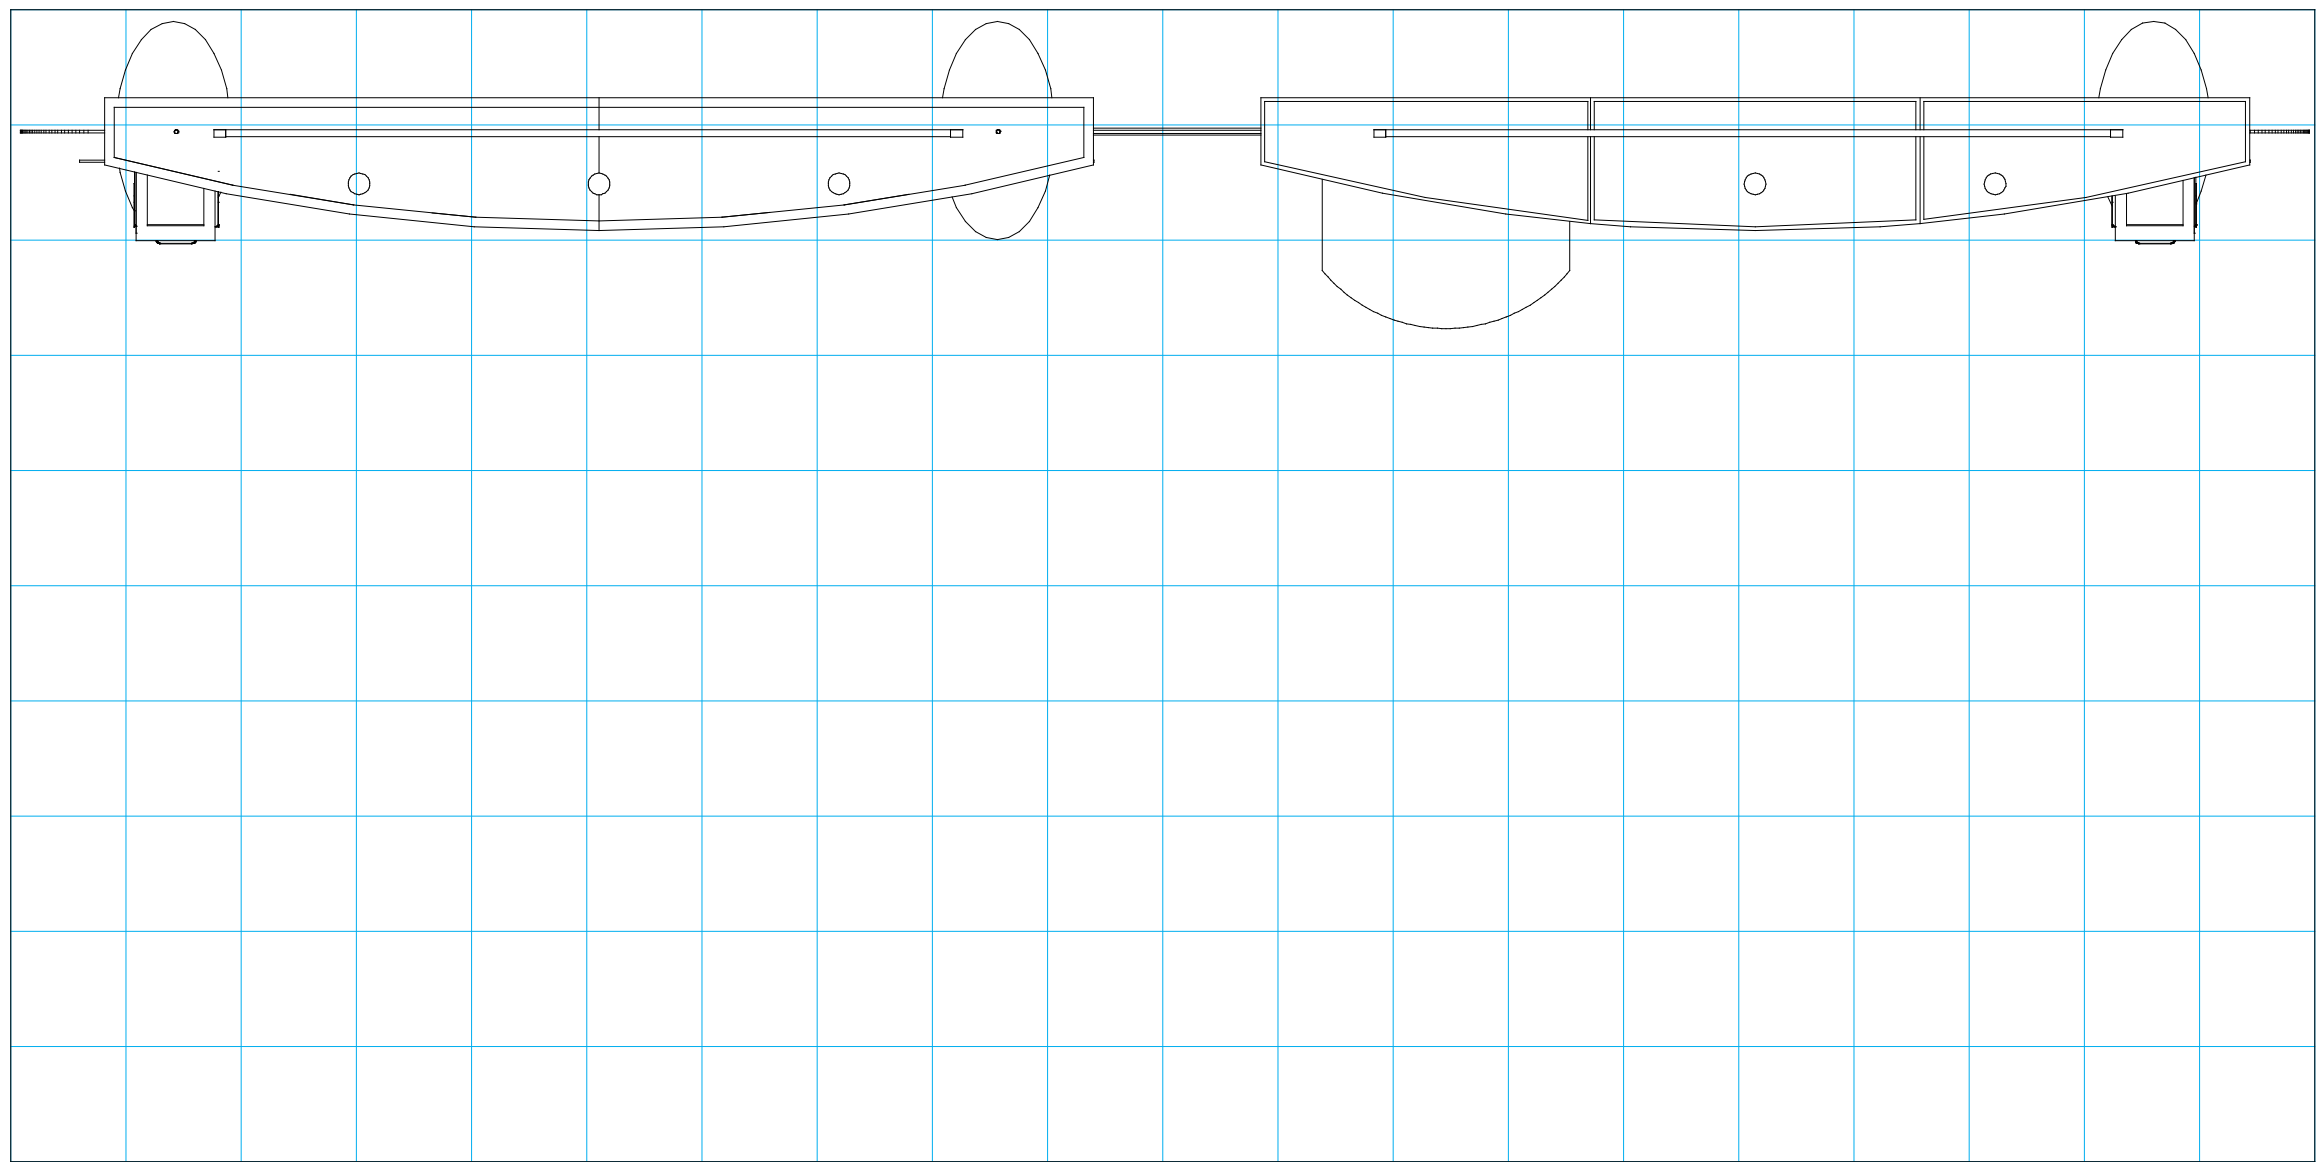

 = 1 sq foot

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

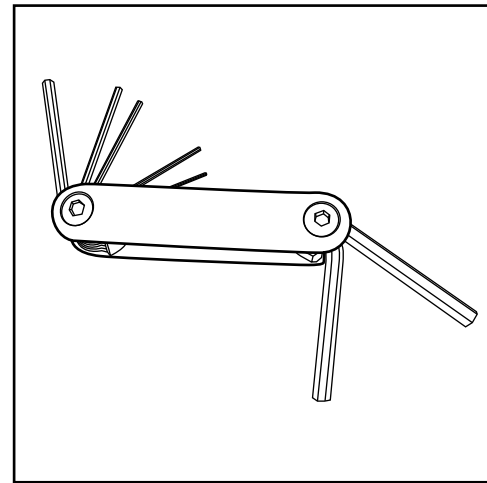


Hex Tool - Essential for Assembly

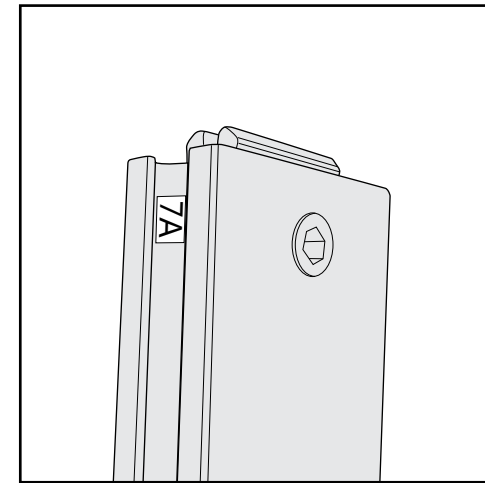


Part Identification - Numbering

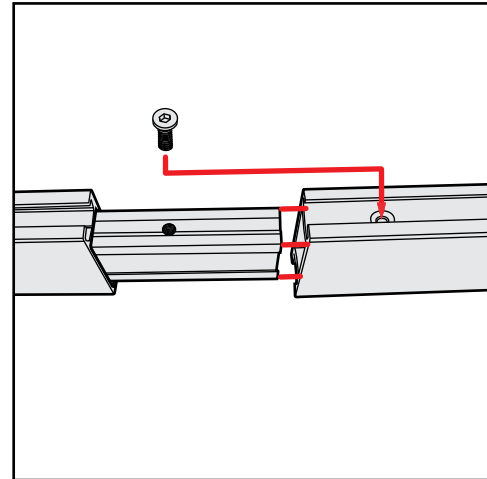


Spline Connection

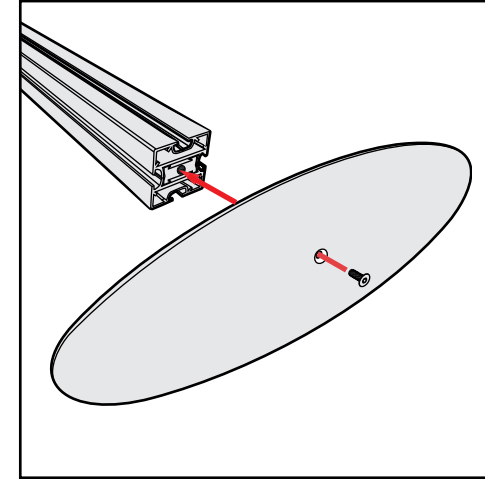

Base Plate & Extrusion Connection

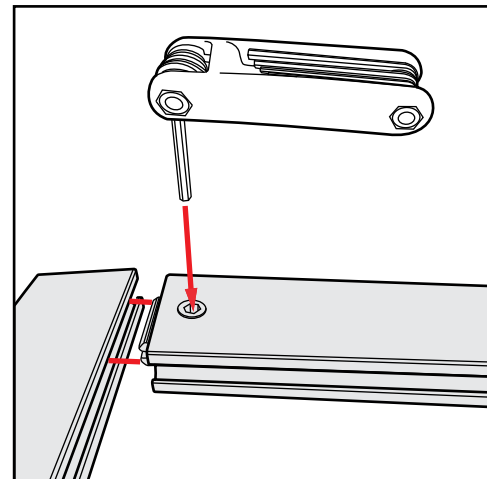

Extrusion & Lock Connection

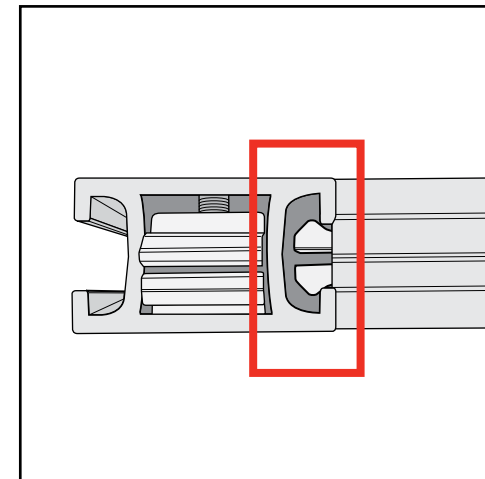


Engaged Lock



**WARNING**



DO NOT USE POWER TOOLS




LADDERS OR LIFTS  
MAY BE REQUIRED




ALL CONNECTIONS MUST  
BE TIGHTLY SECURED


Top View of Each Level

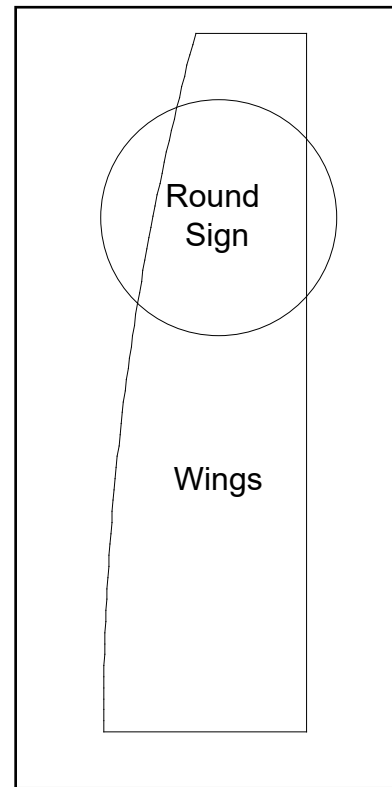


Level 1

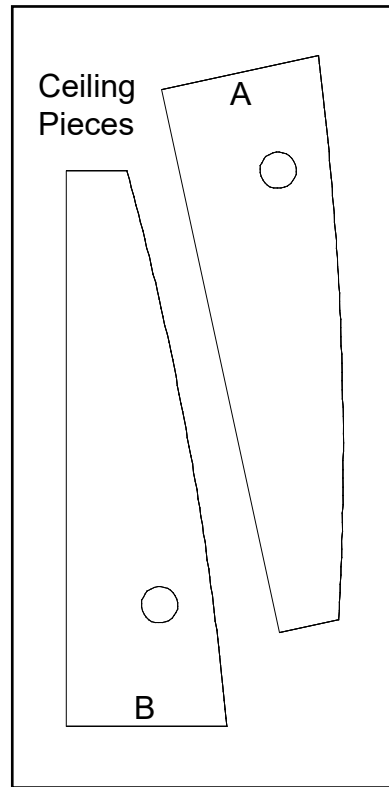


Level 2

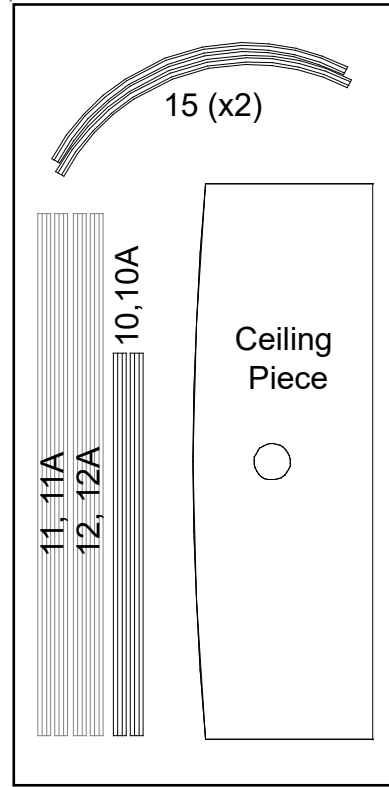

Level 3

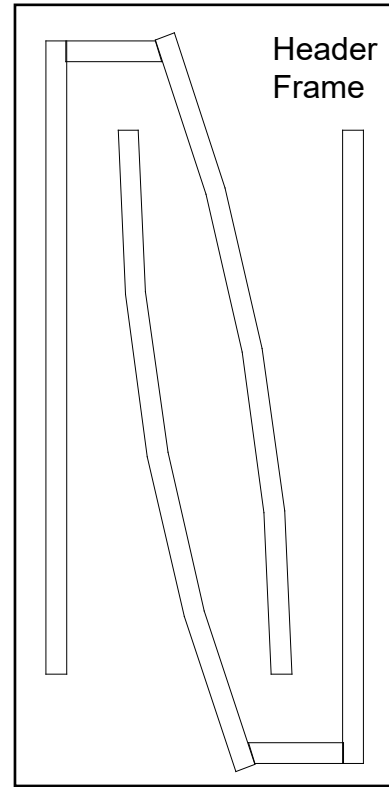


Level 4

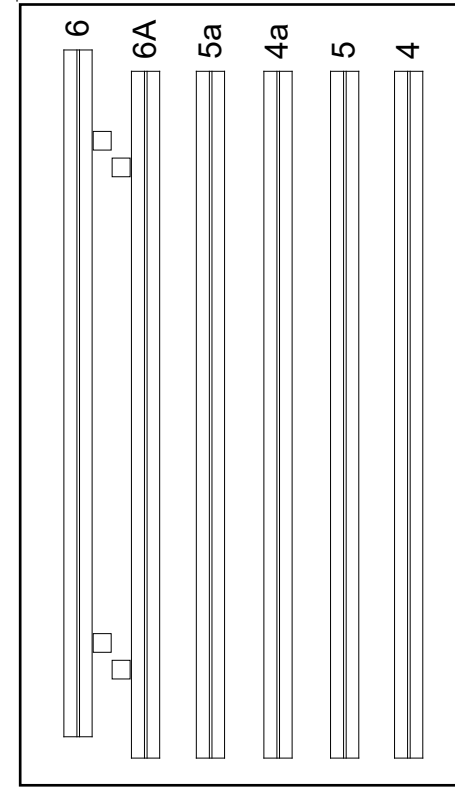


Level 5




Top View of Each Level

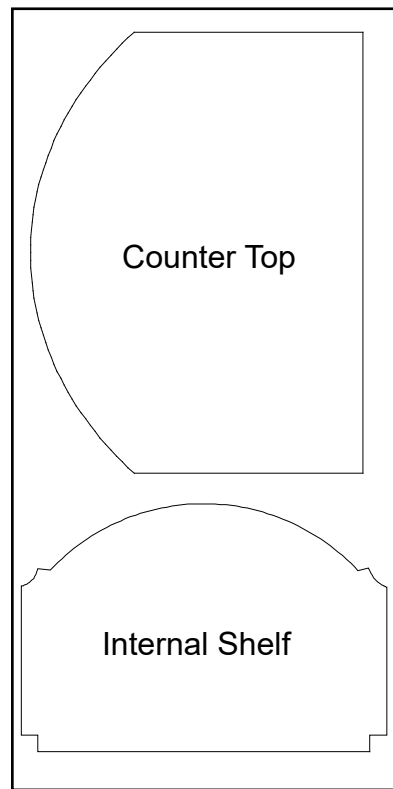

Level 1

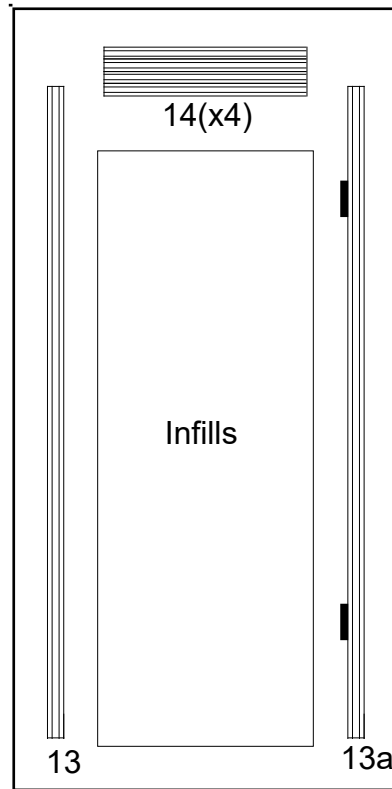


Level 2

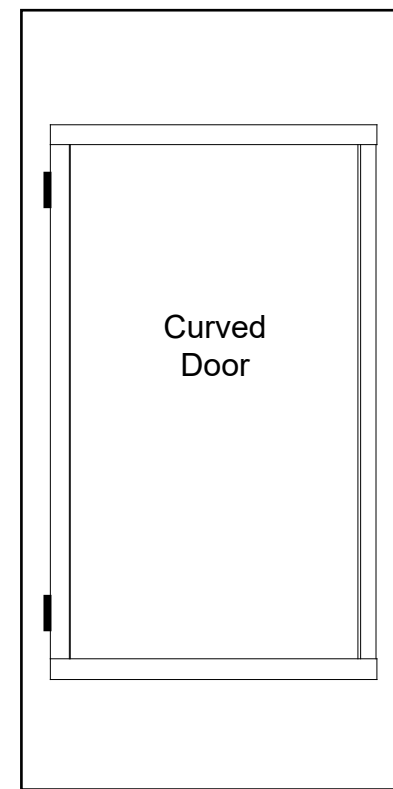


Level 3


Top View of Each Level

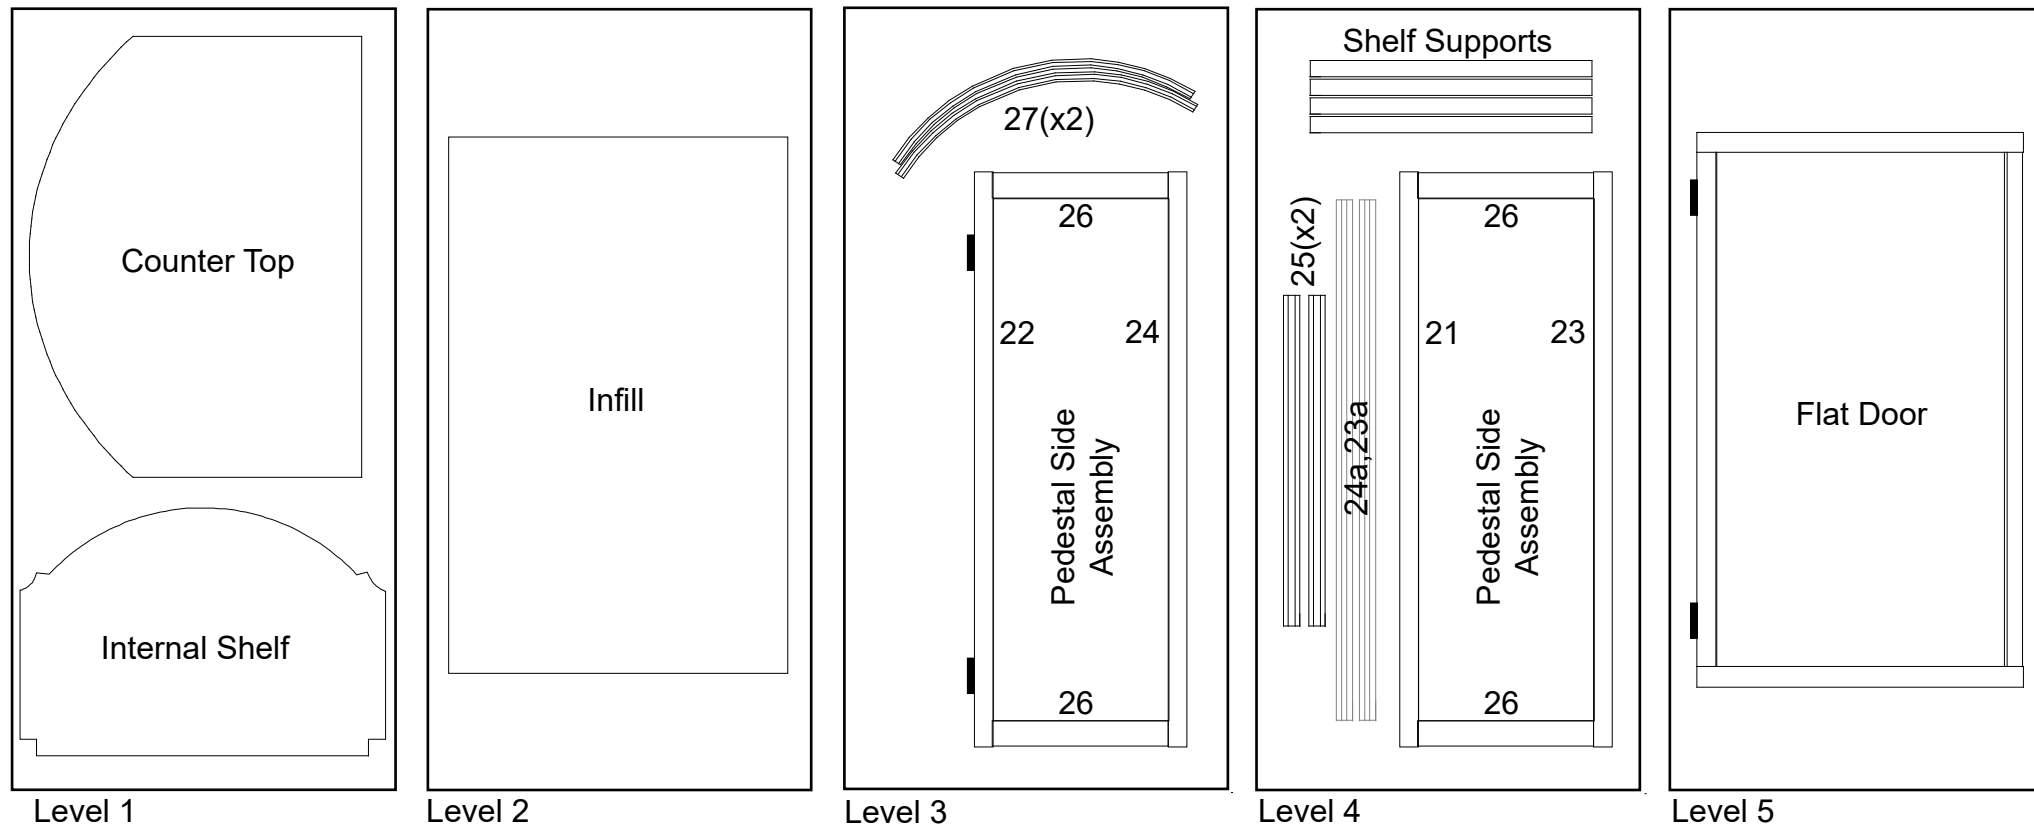


Top View of Each Level

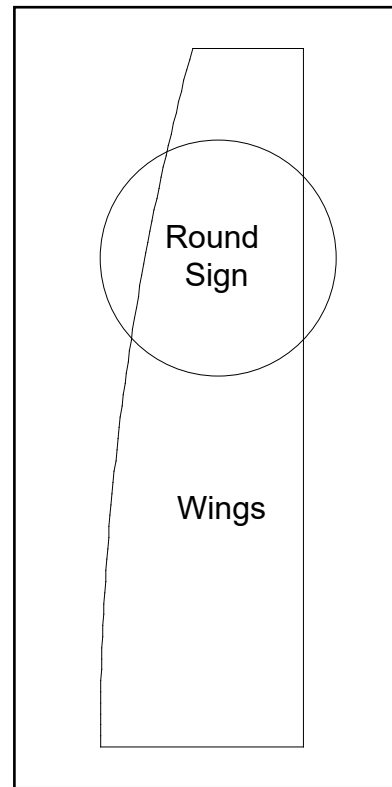


Level 1

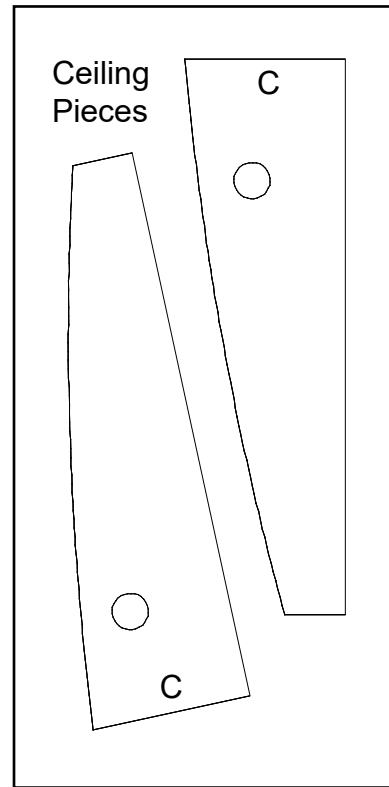

Level 2

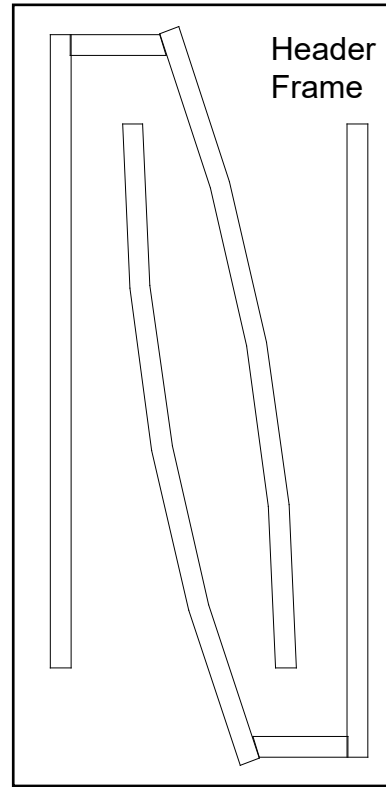

Level 3

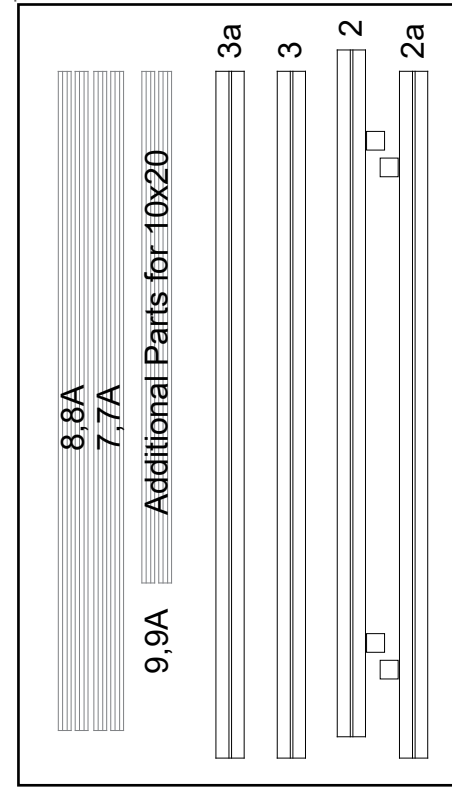


Level 4




Item	Qty.	Description
1	3	Base Plate
2/2A	1/1	42" h Vertical Extrusion
3/3A	1/1	42" h Vertical Extrusion
4	1	42.25" h Vertical Extrusion
4A	1	42" h Vertical Extrusion
5	1	42.25" h Vertical Extrusion
5A	1	42" h Vertical Extrusion
6/6A	1/1	42" h Vertical Extrusion
7/7A	1/1	41.906" w Horizontal Extrusion
8/8A	1/1	41.906" w Horizontal Extrusion
9/9A	1/1	36" w Horizontal Extrusion
10/10A	1/1	22" w Horizontal Extrusion
11/11A	1/1	30" w Horizontal Extrusion
12/12A	1/1	30" w Horizontal Extrusion

- Steps:
- 1) Attach lower vertical extrusions [2,3,6] to base plates [1].
  - 2) Attach upper vertical extrusions to lower vertical extrusions as shown.
  - 3) Connect horizontal extrusions between vertical extrusions as shown.
  - 4) Apply graphics to **velcro** on back of assembled backwall.

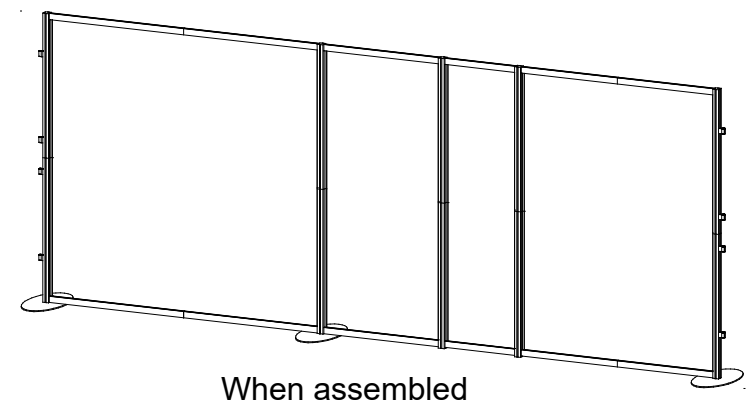

When assembled

### BACK VIEW


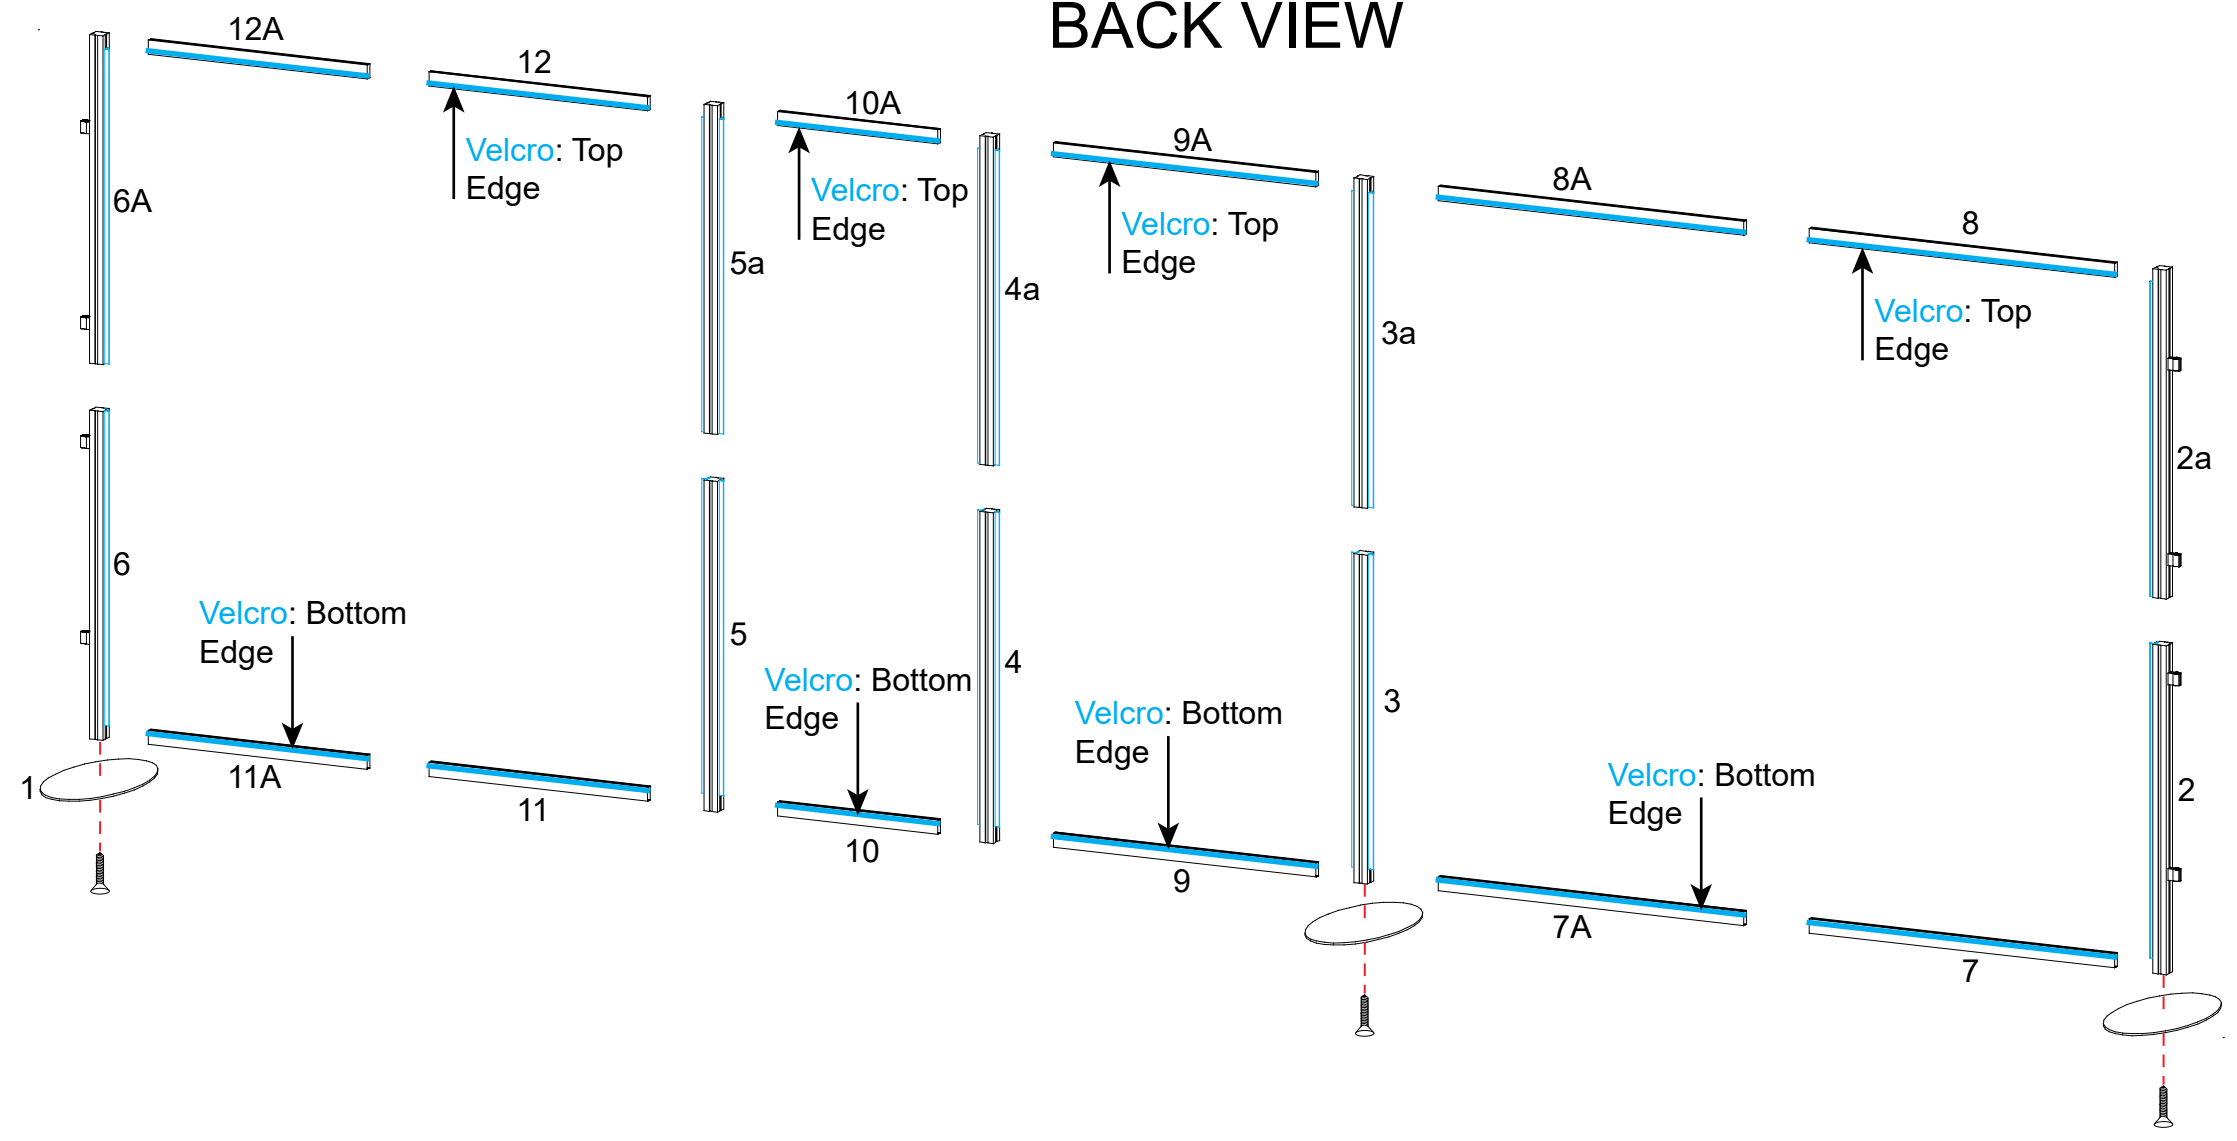


Slide PR37 extrusion into groove of vertical and tighten set screw to secure in place.




Item	Qty.	Description
13/13a	1/1	38" Vertical Extrusion
14	4	12.5" Horizontal Extrusion
15	2	Curved Extrusion

- Steps:
- 1) Attach horizontal extrusions [14] between vertical extrusions [13 & 13a] and inserting infills as shown.
  - 2) Connect horizontal extrusions [15] between verticals [13 & 13a].

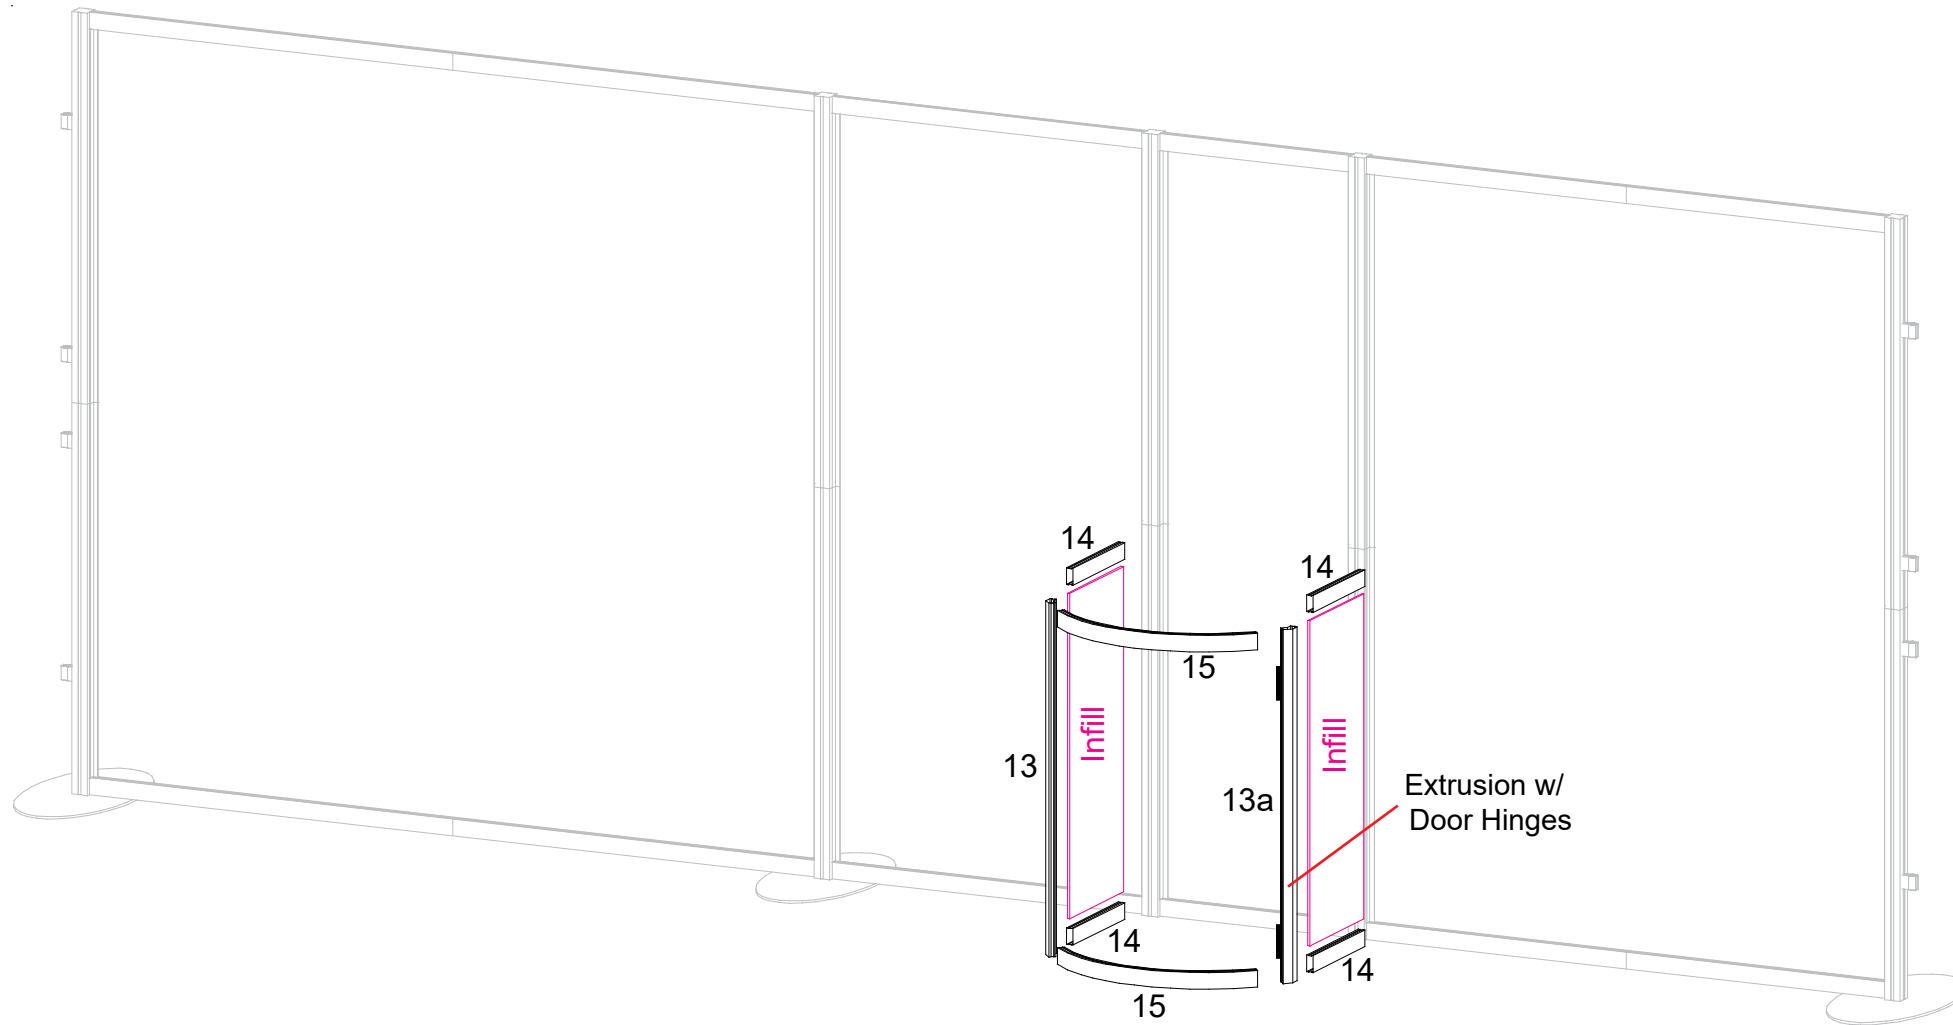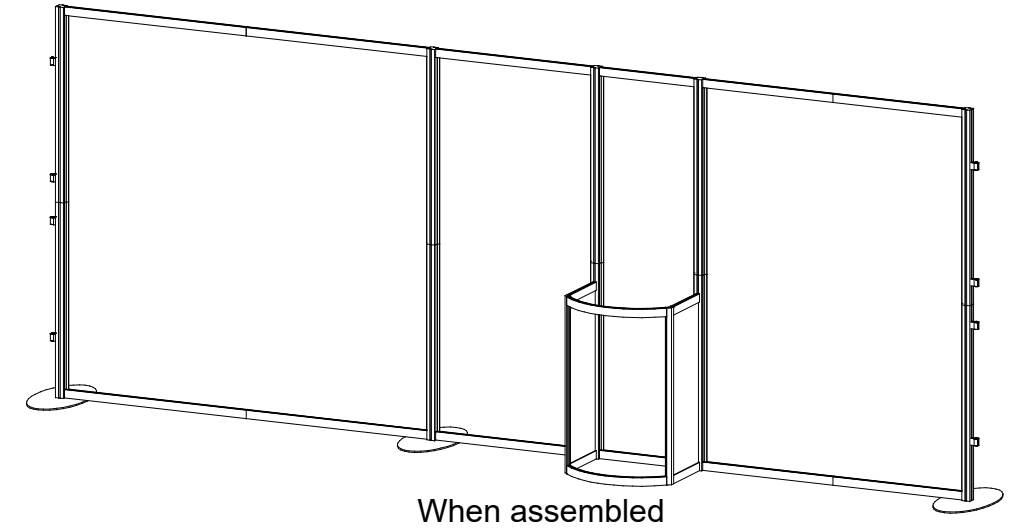

Item	Qty.	Description
16/16A	2/2	5.862" Vertical Extrusion
17A/17B	2/2	40.319" Formed Horizontal Extrusion
18A/18B	2/2	39" Horizontal Extrusion


- Steps:
- 1) Connect ceiling together using the ceiling plates as shown.
  - 2) Connect vertical extrusions [16,16a] to left and right side of horizontal extrusion [18A/18B] as shown.
  - 3) Attach formed horizontal extrusion [17A/17B] to top of vertical extrusions [16,16A] as shown.

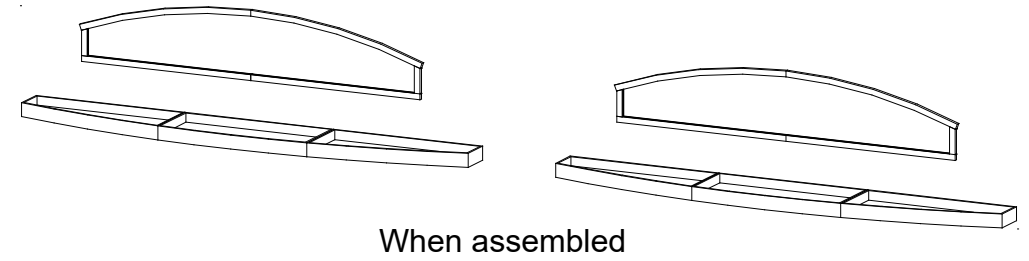

Note: Left side ceiling has 3 puck lights

## RIGHT SIDE CEILING AND HEADER

Note: Left side ceiling has 3 puck lights

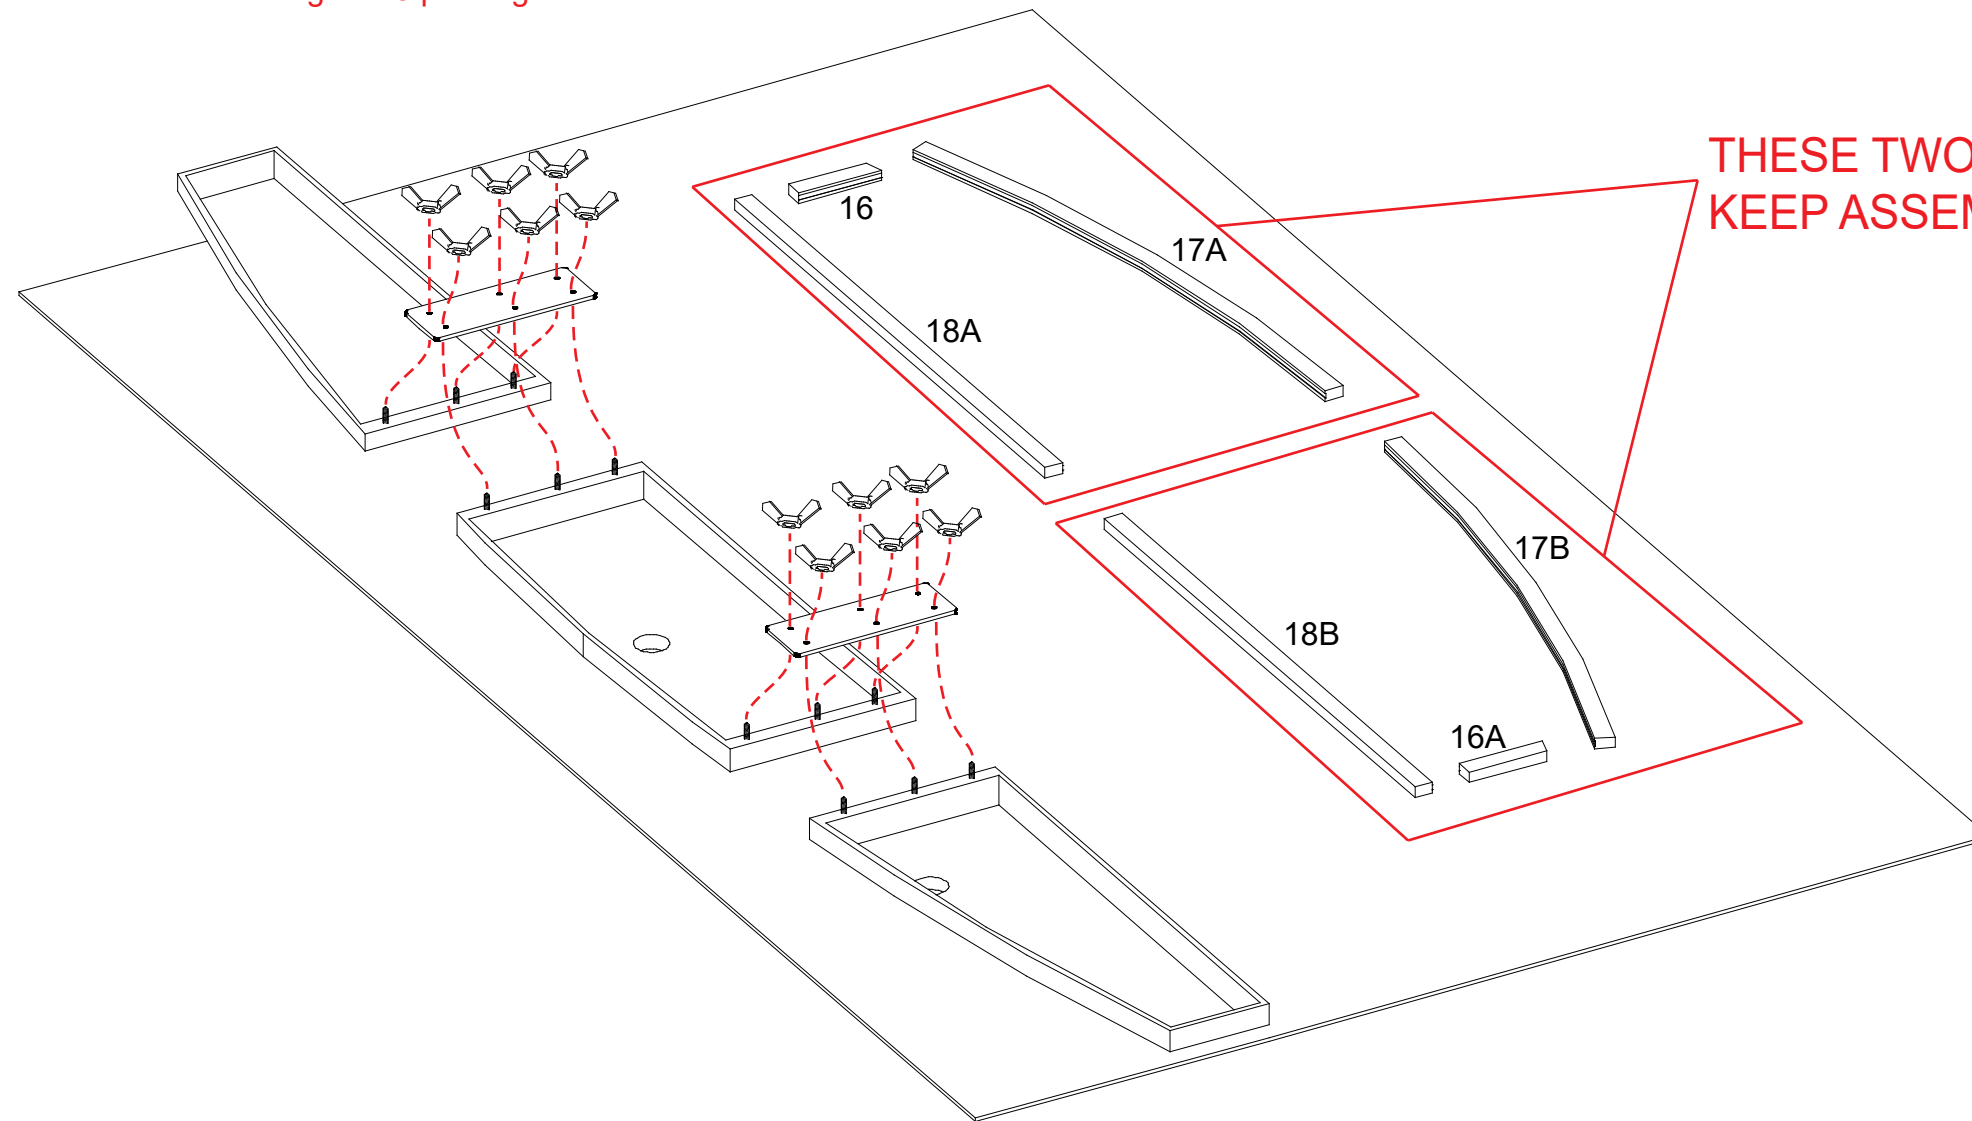



THESE TWO SECTIONS COME ASSEMBLED.  
KEEP ASSEMBLED IN TWO SECTIONS FOR PACKING.

**Steps**

- 1) Attach header & canopy to assembled backwall as shown.
- 2) Attach wings using A10 clamps. See [Wing Attachment](#) detail.
- 3) place shelf on shelf supports.
- 4) Attach door. See [Door Attachment](#) detail.
- 5) place counter on top off counter assembly.

Note: Left side ceiling has 3 puck lights


Attaching Graphics  
Attach Header Graphic to Back of assembled header frames.

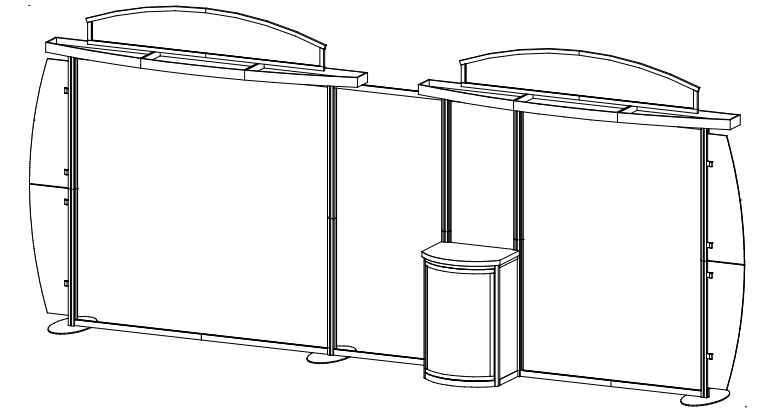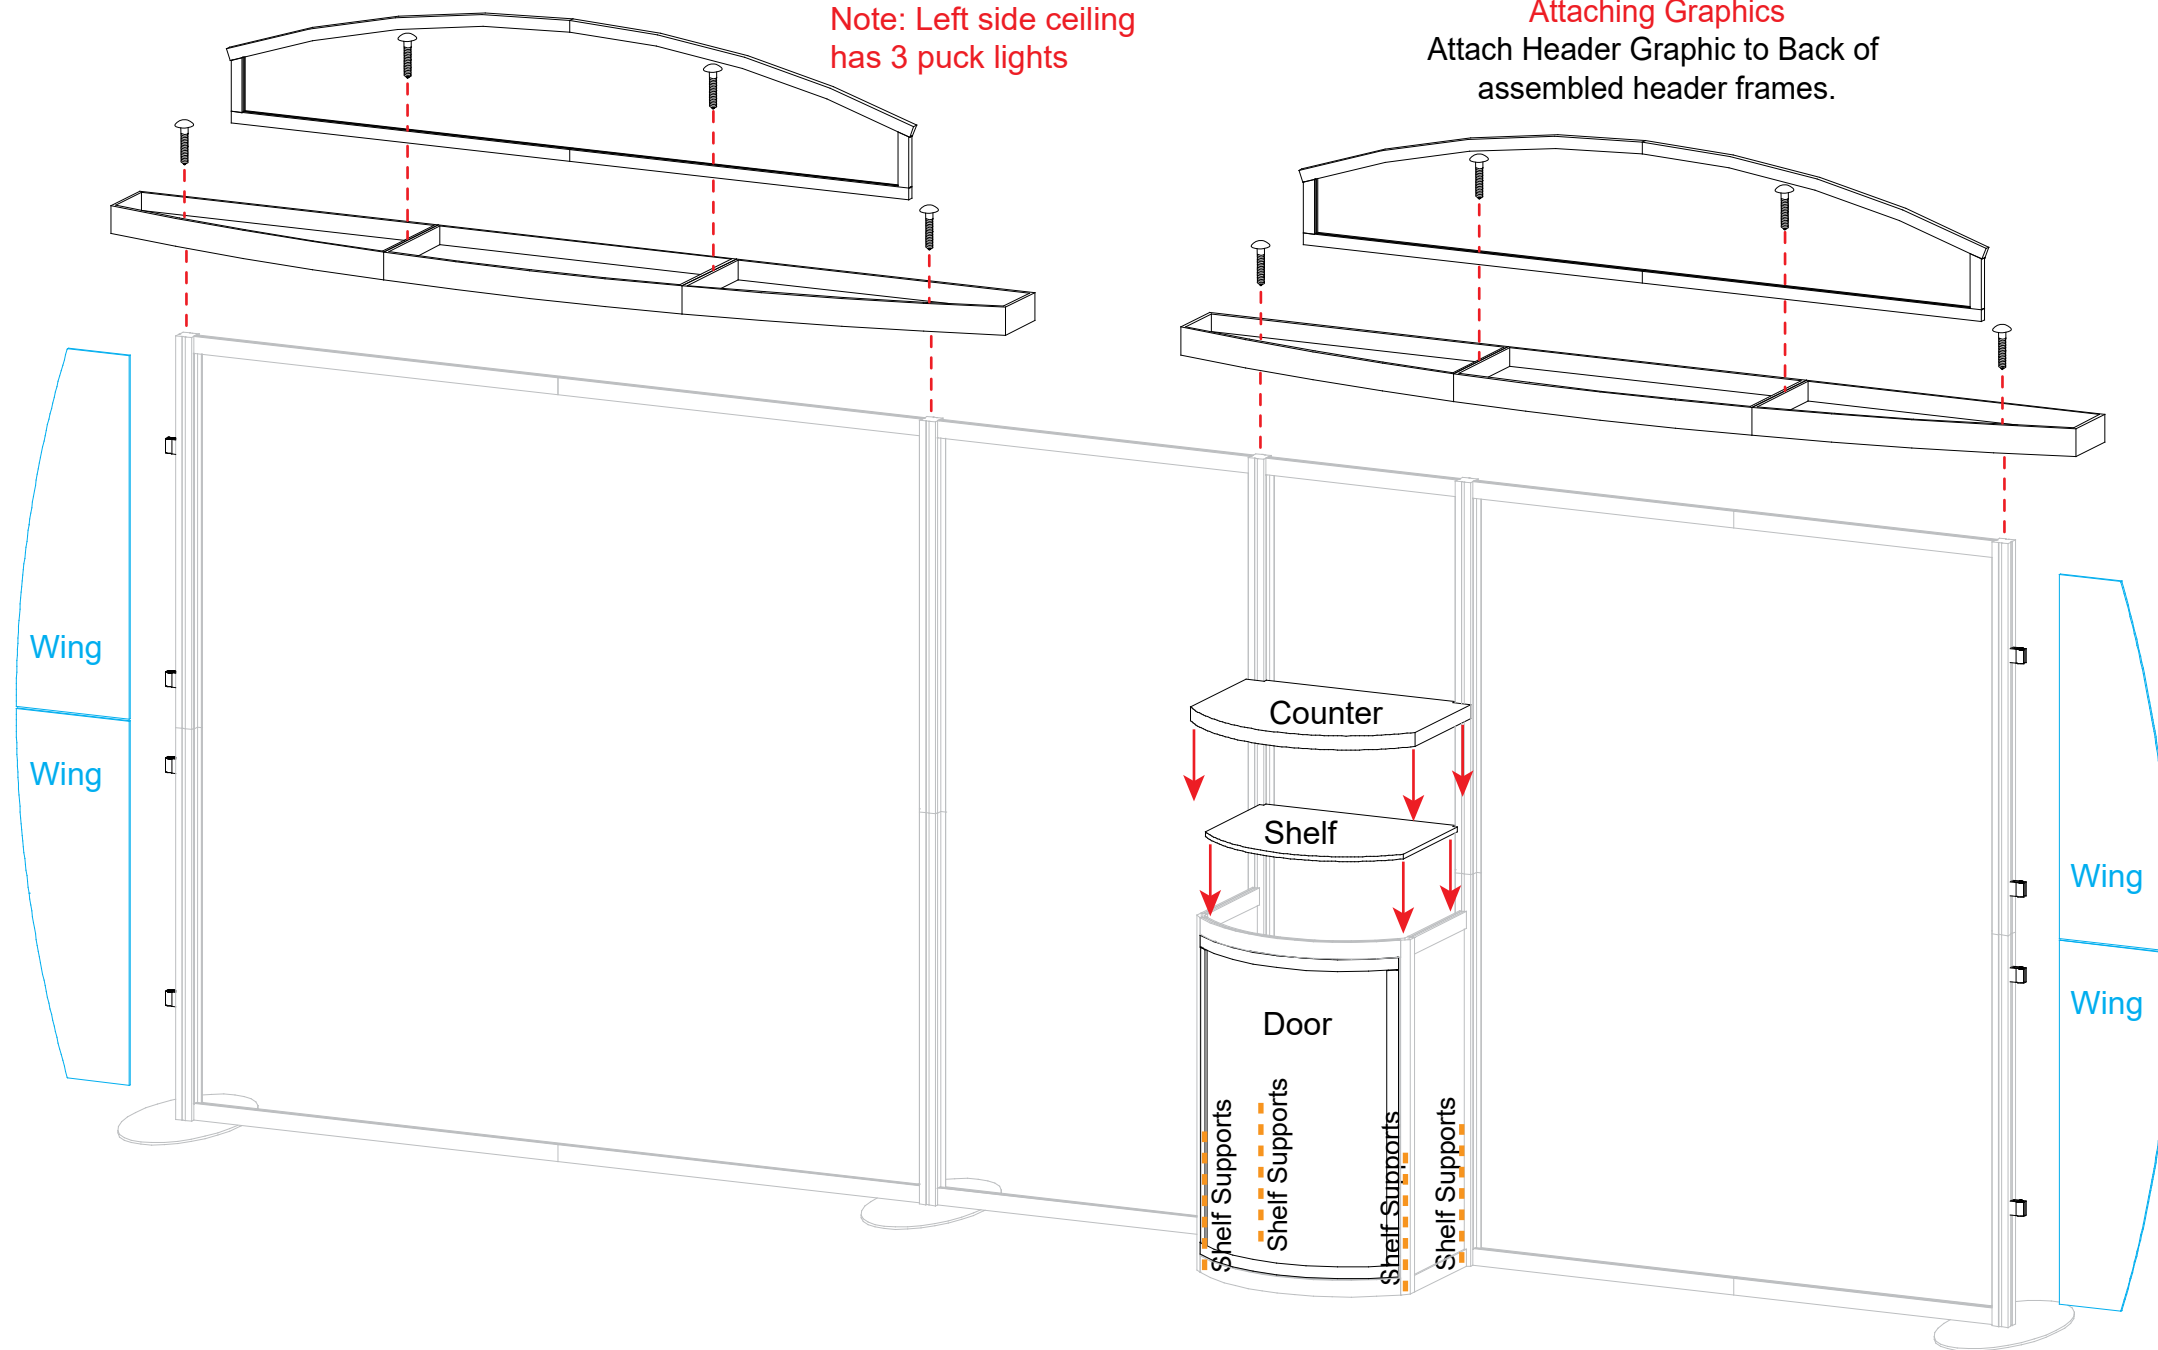


When assembled

**Wing Attachment**

Slide A10 Clamp into groove of square extrusion.



When desired location is found, tighten set screw to secure.




Tighten black plastic set screw to secure Wing in place.





**Door Attachment**

Slide Pin into Hinge attached to Vertical. Slide Door Hinge over Pin.

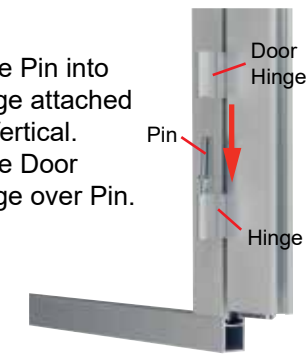


Steps:

- 1) Attach wings using A10 clamps as shown.
- 2) Attach round graphic signs to backwall with standoffs as shown in detail.
- 3) Attach iPad clamshells to backwall as shown in detail.
- 4) Attach literature rack as shown in **Literature Rack Attachment** detail.

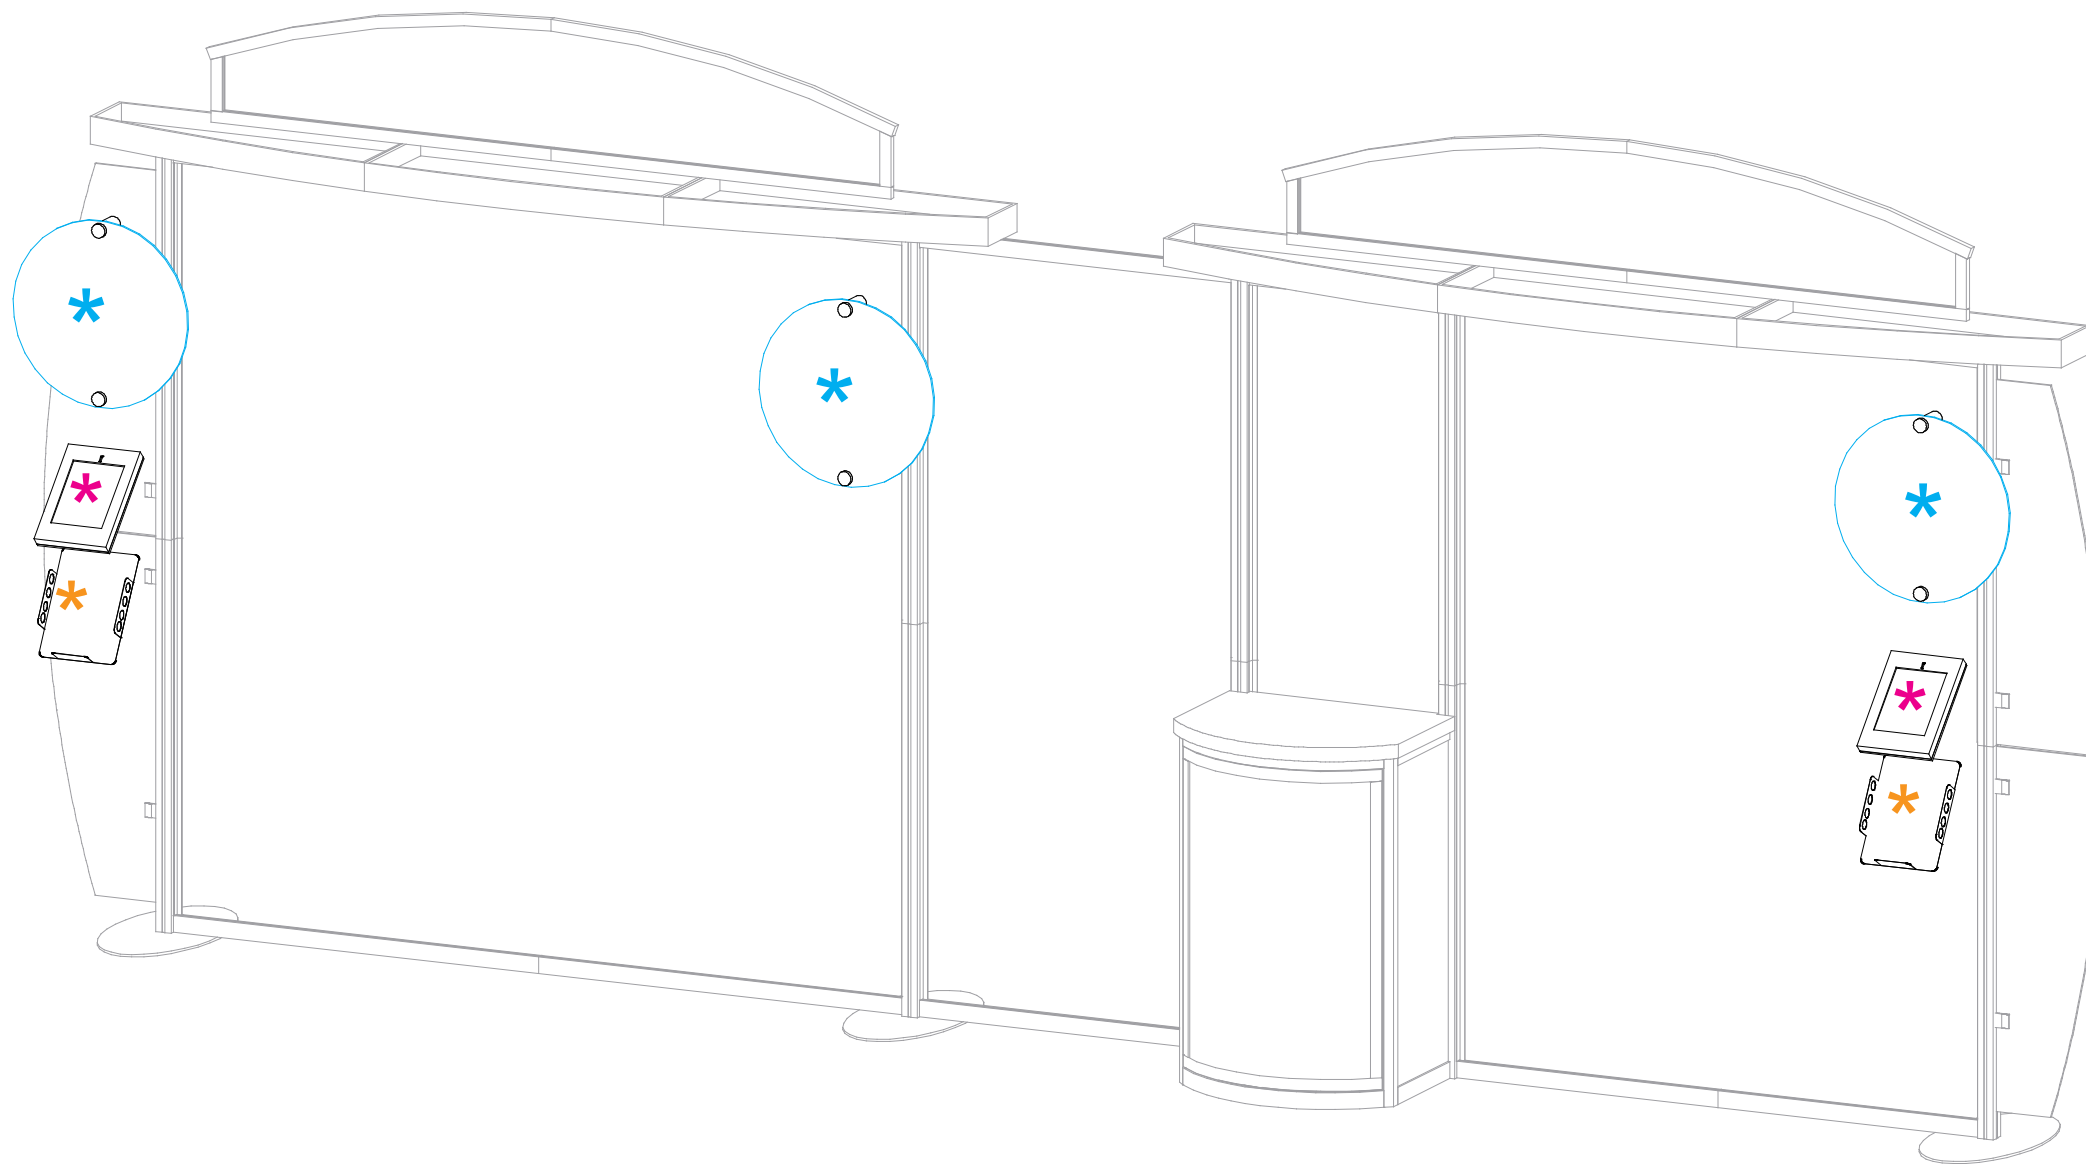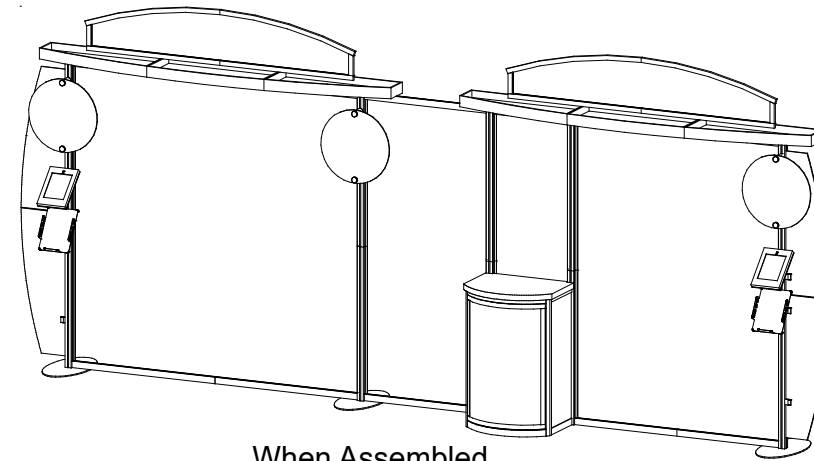


**\* Graphic Attachment**

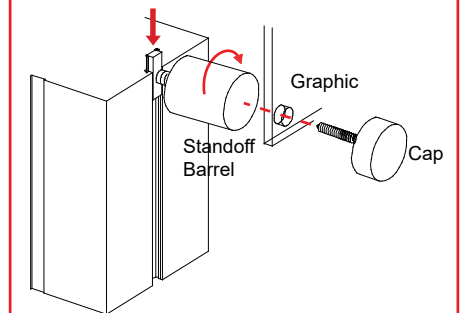


Slide connector on back of standoff barrels into groove of extrusion and twist to secure in place. Secure graphic to standoffs using screw caps.

**\* Literature Rack Attachment**

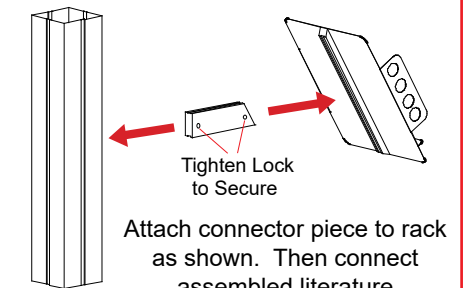

Attach connector piece to rack as shown. Then connect assembled literature rack to vertical extrusion.

**\* iPad Mount Attachment**

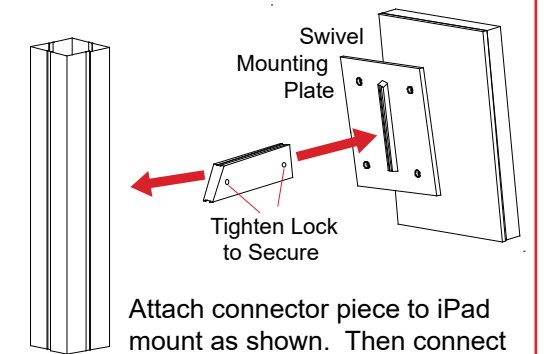

Attach connector piece to iPad mount as shown. Then connect assembled iPad mount to vertical extrusion.

Item	Qty.	Description
1	1	38" Vertical Extrusion w/ Door Hinges
2	1	38" Vertical Extrusion w/ Door Stop
3	1	38" Vertical Extrusion
4	1	38" Vertical Extrusion
5	2	22.0197" Horizontal Extrusion
6/6a	2/2	12.5" Horizontal Extrusion
7	2	25.639" Curved Extrusion

**Steps**

- 1) Attach lower horizontal extrusions [5,6,7] between vertical extrusions [1,2,3,4] as shown.
- 2) Hang assembled door on hinges on vertical [1] as shown. Refer to detail.
- 3) Place side and front inserts between verticals as shown.
- 4) Attach upper horizontal extrusions [5,6a,7] between vertical extrusions [1,2,3,4] and on top of infills as shown.
- 5) Velcro shelf support to inside of pedestal, then set internal shelf on top of supports.
- 6) Place counter top on assembled pedestal.

